



## Product Description


The KBC FCHA1 series uses the most advanced digital technologies to provide excellent repeatable performance for today's CCTV systems. It supports transmission of one video channel, one 'Up the Coax' data channel and two duplex contact closure channels over one multimode or singlemode optical fiber. PAL, NTSC and SECAM video standards are fully supported. The plug-and-play design ensures ease of installation with no electrical or optical adjustment needed. LED indicators are provided to clearly display the operational status of the unit. The series is available in wall-mount and 3U chassis card.



## Product Features

- 10 bit digitally-encoded, non-compressed video transmission
- Dual module 3U chassis card
- Compatible with all major 'Up the Coax' manufacturers' equipment
- 2 full duplex contact closure channels

## Typical System Configuration

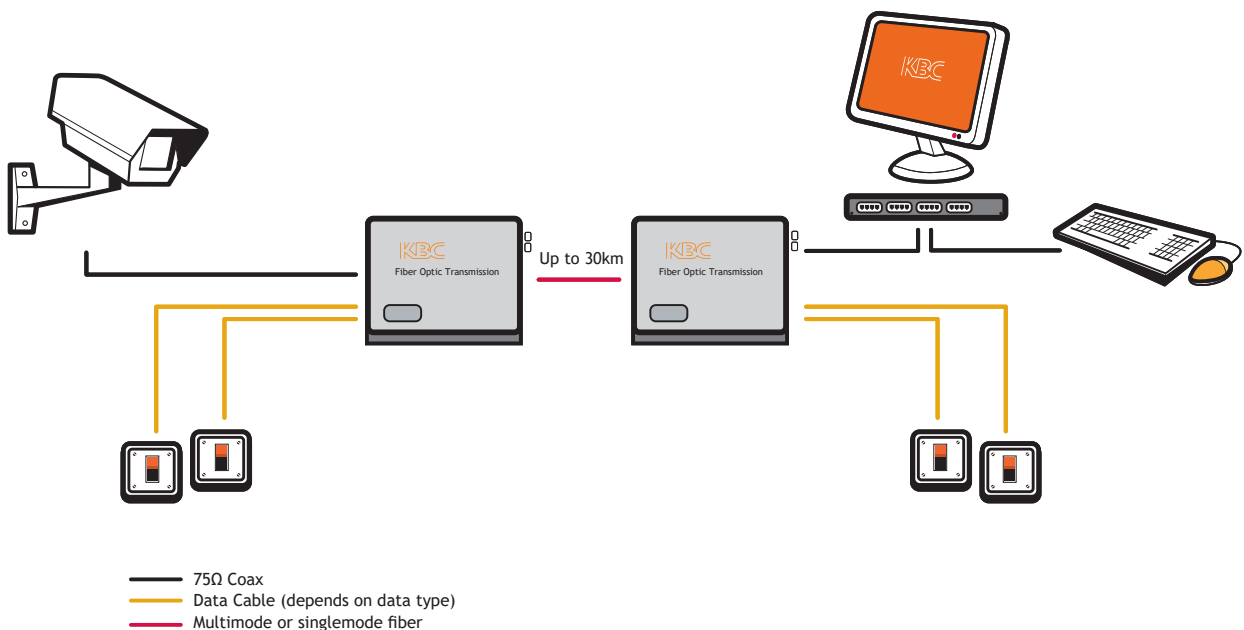

# Specifications

### Video

No. of Channels	1
Format	PAL / NTSC / SECAM
Input/Output	1.0V pk-pk typical, 75Ω
Bandwidth	5 Hz - 6.5 MHz
Digital Encoding (non compressed)	10 bit
Differential Gain (10-90% APL)	<2.0%
Differential Phase (10-90% APL)	<2.0°
SNR	>60dB

### Data<sup>(1)</sup>

Data Formats	Up the Coax
One way Channel	1
or	
Two Way Channels	1

### Contact Closure

No. of duplex Channels	2
Response Time	500µs
Output	SPST Relay, Normally Open
Switch Rating	0.8A @ 25 Vdc max 0.4A @ 110 Vac max

### Optical

Wavelength	1310nm / 1550nm
Fiber	Multimode or Singlemode
Number of Fibers	1

### Power

Power Input	Wall-mount	12-24 Vac/dc @ 400mA
Power Supply for wall-mount <sup>(2)</sup>		Input: 100 - 240 Vac Output: +12 Vdc UL and cUL listed PSU Supplied from FR3 PSU
Chassis Card		

### Environmental

Operating Temperature	-40° - +74° C / -40° - +165° F
Storage Temperature	-40° - +74° C / -40° - +165° F
Operating Humidity	0 to 95% non-condensing
Mean Time Between Failure (MTBF)	>100,000 Hours

### Mechanical

Dimensions (Wall-mount L x W x H) <sup>(7)</sup>	155mm x 90mm x 36mm (6.1" x 3.45" x 1.42")
Number of 3U Chassis Card Slot <sup>(3)</sup>	1

### Connectors


Video	BNC
Contact Closure	Screwblock Terminal
Fiber	ST, SC or FC (ST fitted as standard)
Power <sup>(4)</sup>	Wall-mount Screw Block Terminal

### DIP Switch Settings

Telemetry Selection	On / Off
---------------------	----------

# Part Number Configurator

## FCHA1-M1T-WSB

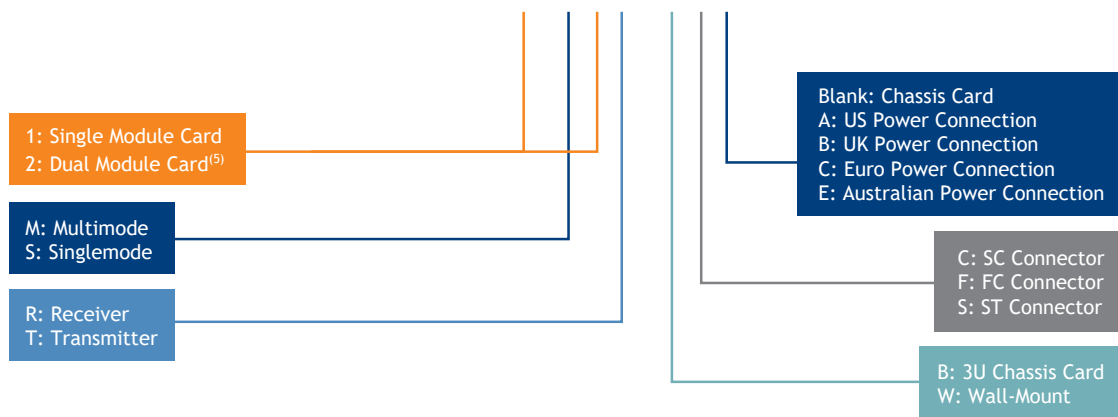

# Optical Budget

Part Code	Fiber Type	No.	Optical Budget			Wavelength nm	Approximate Transmission Distance <sup>(6)</sup>
			50µm	62.5µm	9µm		
FCHA1-M*	Multimode	1	8dB	12dB		1310/1550nm	0-4km
FCHA1-S*	Singlemode	1			15dB	1310/1550nm	0-30km

Transmission distances up to 120km are available please contact KBC Networks for details. All KBC Networks optical transmitters are LASER based.

- FCHA1 unit supports systems such as Pelco Coaxitron™, Bosch Bilinx™, Panasonic Proteus™, BBV and other leading manufacturers.
- Please select the power plug from US Standard, Euro 2 Circular or UK 3 Pin square when placing order.
- Supports maximum of up to 14 single slot cards in each 3U Chassis.
- Power lines are crimped and fitted to screw block connector in factory.
- The dual module 3U card is available in receiver format only and does not provide the contact closure circuits.
- Transmission distance is limited by optical loss of the fiber and loss introduced by connectors, splices and patch panels. Fiber bandwidth also limits the transmission distance.
- Product body dimensions. Please contact KBC Networks for product drawing and dimensions of mount

Due to ongoing technological improvements, product specifications are subject to change without notice. KBC is not liable for any errors, omissions or changes of any description of the goods contained herein. This information is for the sole purpose of identifying the products, and KBC makes no warranty that the products conform to any description contained herein. Do not rely solely on any representations, statements, or assertions concerning these Products contained herein.