

## Product Description

The DRP-480S-48 & SDR-480-48 series are power supply units for use with the KBC PoE series industrial Ethernet edge switches. They are designed for use in a wide range of operating temperatures in non-environmentally conditioned, industrial applications. Both the DRP-480S-48 and SDR-480-48 units provide 480W at 48Vdc.

The series is available in DIN rail configurations.




## Product Features


- Protections: short circuit, overload, overvoltage & over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- 100% full load burn-in test
- 3 year warranty

## De-rating Curve



DRP-480S-48

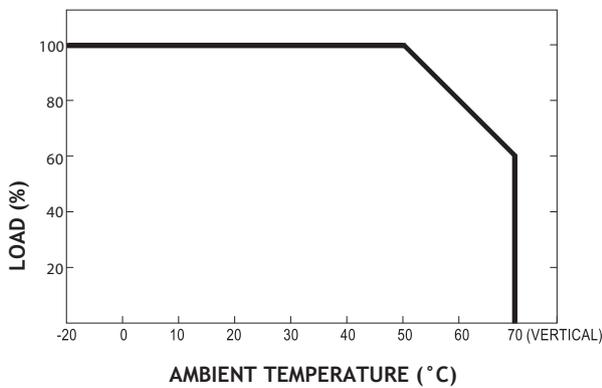

## Output De-rating vs Input Voltage

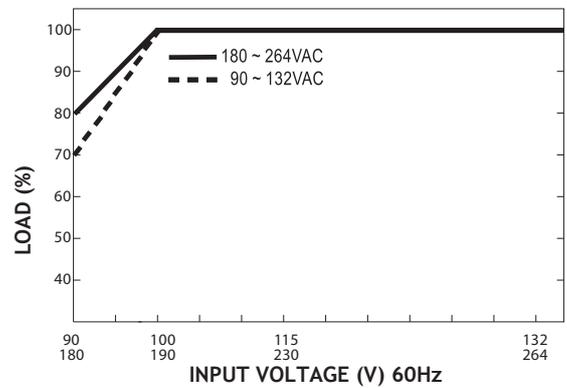

SDR-480-48

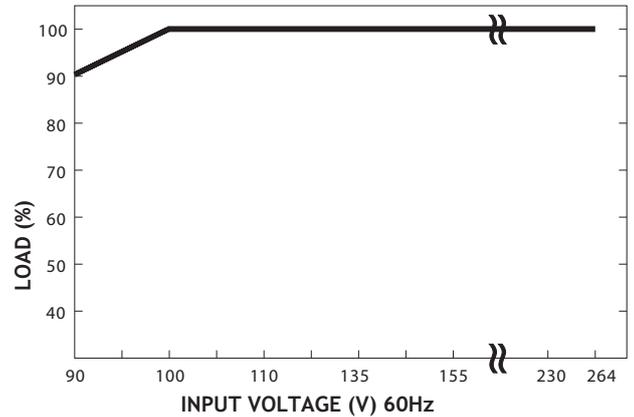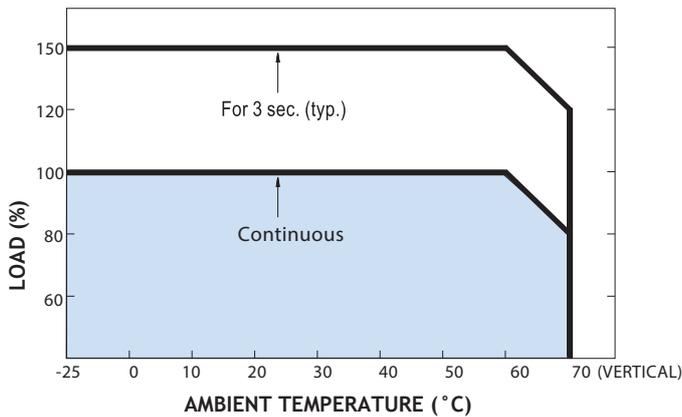

# Specifications

## Output

	DRP-480S-48	SDR-480-48
DC Voltage	48Vdc	48Vdc
Rated Current	10A	10A
Current Range	0-10A	0-10A
Rated Power	480W	480W
Peak Current		15A
Peak Power		720W (3 secs max)
Ripple & Noise (max) <sup>(1)</sup>	120mVp-p	120mVp-p
Voltage Adj. Range	48-55Vdc	48-55Vdc
Voltage Tolerance <sup>(2)</sup>	±1.0%	±1.0%
Line Regulation	±0.5%	±0.5%
Load Regulation	±1.0%	±1.0%
Setup, Rise Time	1200ms, 40ms/230Vac 1200ms, 40ms/115Vac at full load	1500ms, 150ms/230Vac 3000ms, 150ms/115Vac at full load
Hold Up Time	23ms/230Vac 23ms/115Vac at full load	14ms/230Vac

## Input

	DRP-480S-48	SDR-480-48
Voltage Range <sup>(3)</sup>	90 - 132Vac / 180-240Vac (by switch) 254 - 370Vdc	90 - 264Vac 127 - 370Vdc
Frequency Range	47 - 63Hz	47 - 63 Hz
Efficiency (typ)	89%	94%
AC Current (typ)	8A/115Vac 3.2A/230Vac	5A/115Vac 2.5A/230Vac
Inrush Current (typ)	cold start 27A/115Vac 45A/230Vac	40A/115Vac 80A/230Vac
Leakage Current	<3.5mA/240Vac	<0.8mA/240Vac

## Protection

	DRP-480S-48	SDR-480-48
Overload	105 - 150% rated output power Protection type: constant current limiting, auto-recovery after fault condition removed	Normally works within 110 - 150% rated output power for more than 3 secs & then shut down output voltage with auto-recovery. >150% rated power, constant current limiting with auto-recovery within 2 secs & may shut down after 2 secs.
Over Voltage	30 - 36V Protection type: shut down output voltage, repower on to recover	56 - 65V Protection type: shut down output voltage, with auto-recovery or re-power on to recovery
Over Temperature	100°C ±5°C (TSW1: detect on power switch heat-sink. Protection type: shut down output voltage, auto-recovery after temp goes down.	105°C ±5°C (TSW: detect on heatsink of power switch). Protection type: shut down output voltage, auto-recovery after temp goes down.

## Mechanical

	DRP-480S-48	SDR-480-48
Dimensions	227mm x 126mm x 100mm (8.94" x 4.96" x 3.94")	86mm x 126mm x 129mm (3.34" x 4.96" x 5.08")
Weight	2.6kg (5lb 12oz)	1.6kg (3lb 9oz)

## Environmental

	DRP-480S-48	SDR-480-48
Operating Temperature <sup>(4)</sup>	-20° - +70°C / -4° - 158°F	-25° - +70°C / -13° - 158°F
Operating Humidity	20 to 90% RH non-condensing	20 to 95% RH non-condensing
Storage Temperature	-40° - +85°C / -40° - 185°F	-40° - +85°C / -40° - 185°F
Temp Coefficient	±0.03%/°C(0 - 50°C) 10 - 500Hz, 2G 10 min/1 cycle 60 min each along X, Y, Z axis	±0.03%/°C(0 - 50°C) Component: 10 - 500Hz, 2G 10min/1cycle 60 min each along X, Y Z axes
Mean Time Between Failure (MTBF)	187.9khrs min MIL-HDBK-217F (25°C)	112.9khrs min MIL-HDBK-217F (25°C)

## Approvals

DRP-480S-48	SDR-480-48
UL508	UL508
UL60950-1	TUV EN60950-1
TUV EN60950-1	EN55022 (CISPR22) Class B
EN55011 (CISPR11)	EN61000-3-2,3
EN55022 (CISPR22)	EN61000-4-2,3,4,5,6,8,11
EN61204-3 Class B	EN55024
EN61000-3-2,3	EN61000-6-2
EN61000-4-2,3,4,5,6,8,11	EN61204-3
EN61000-6-2	SEMI F47, GL
EN61204-3	

# Part Numbers

**DRP-480S-48**

Standard power supply unit

**SDR-480-48**

Extended temperature range power supply unit

For use with the ESUG8P PoE switch - see separate specification sheet for further information

All parameters not specifically mentioned are measured at 230Vac input rated load and 25°C ambient temperature. The power supply is considered a component which will be installed with the final equipment. The final equipment must be re-confirmed so that it still meets the EMC directives.

- Ripple & noise are measured at 20MHz of bandwidth by using 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor
  - Tolerance: includes set up tolerance, line regulation and load regulation
  - SDR-480-48 De-rating may be needed under low input voltages. Please check the de-rating curve for more details
  - SDR-480-48: installation clearances: 40mm above, 20mm below, 5mm either side are recommended when loaded permanently with full power. If the adjacent device is a heat source then 15mm clearance is recommended.
- Due to ongoing technological improvements, product specifications are subject to change without notice. KBC is not liable for any errors, omissions or changes of any description of the goods contained herein. This information is for the sole purpose of identifying the products, and KBC makes no warranty that the products conform to any description contained herein. Do not rely solely on any representations, statements, or assertions concerning these Products contained herein.